

# SPIDER SECURITY PRODUCTS

PHYSICAL SECURITY REDEFINED.™



## A&E SPECIFICATIONS

### SPIDER BLOCKER


PART NUMBER: SSP-SBL-301

PART NUMBER: SSP-SBL-308

PART NUMBER: SSP-SBL-316

### PRODUCT DIMENSIONS & RATINGS

(All measurements in inches)

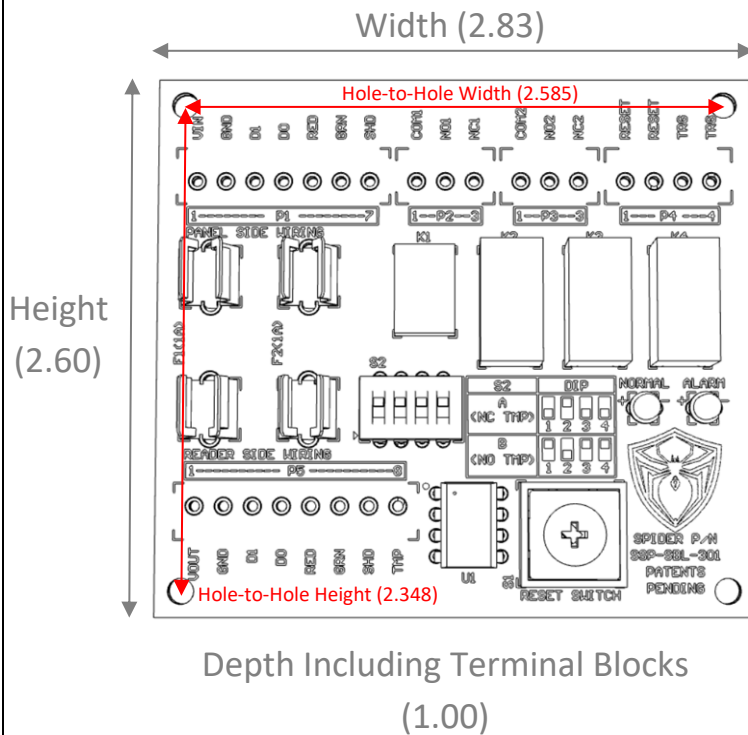

### TECHNICAL DETAILS

Dimensions W/L/D: [72mm x 66mm x 25.8mm] [2.83" x 2.60" x 1.00"H]

Operating Voltage: 12 Volts DC

Current Draw: 25mA (Nominal), 100mA (Alarm)

Power Consumption: .3W (Nominal), 1.2W (Alarm)

Fuses: [F1: Board] 5mmx20mm 1A Fuse, [F2: Reader] 5mmx20mm 1A Fuse

On-Board Features: Simple Panel & Reader Wiring, Status LEDs, 2 Alarm Outputs, Remote Triggering/Resetting, On-Board Reset Pushbutton, Tamper Input

Alarm Outputs: Two SPDT "Form C" Relays [P2] and [P3]

P2/P3 Relay Output Ratings: 250VAC/220VDC Maximum or 2 Amps Maximum

Wiring Terminals: Removeable Connectors with Slotted Screw Terminals

Switch S2: (Mode A) N.C. Tamper Signal, (Mode B) N.O. Tamper Signal

Nominal Operating Temperature: 60-95 Degrees Fahrenheit

Package Contents (1) Spider Blocker Module, (2) Foam Mounting Strips, Install Guide  
Made in the USA – Patents Pending

Optional Equipment:

Spider Tamper Switches: SSP-RDR-880/882/884-TAMPER

Spider Blocker Mount: SSP-SBL-301-MNT

### OPTIONAL SPIDER BLOCKER ARRANGEMENTS AND ACCESSORIES:

SSP-SBL-301: Single Spider Blocker Module (above)

SSP-SBL-308 [BlockerBox 8]: (Qty 8) Spider Blocker Modules in Wall Mount Enclosure: (D x W x H) 5" x 21.25 x 13.75"

SSP-SBL-316 [BlockerBox 16]: (Qty 16) Spider Blocker Modules in Wall Mount Enclosure: (D x W x H) 5" x 21.25 x 13.75"

SSP-SBL-301-MNT: ABS DIN Rail or Flat Panel Mount for the Spider Blocker Module

SSP-RDR-880-TAMPER-PRS: "Press Mounted" 3/8" N.C. Reader Tamper Switch

SSP-RDR-882-TAMPER-FLG: "Flange Mounted" 3/8" N.C. Reader Tamper Switch

SSP-RDR-884-TAMPER-BRK: "Bracket Mounted" 3/8" N.C. Reader Tamper Switch

CRUCIAL INFO AT: [WWW.SPIDERPROTECT.COM](http://WWW.SPIDERPROTECT.COM)